
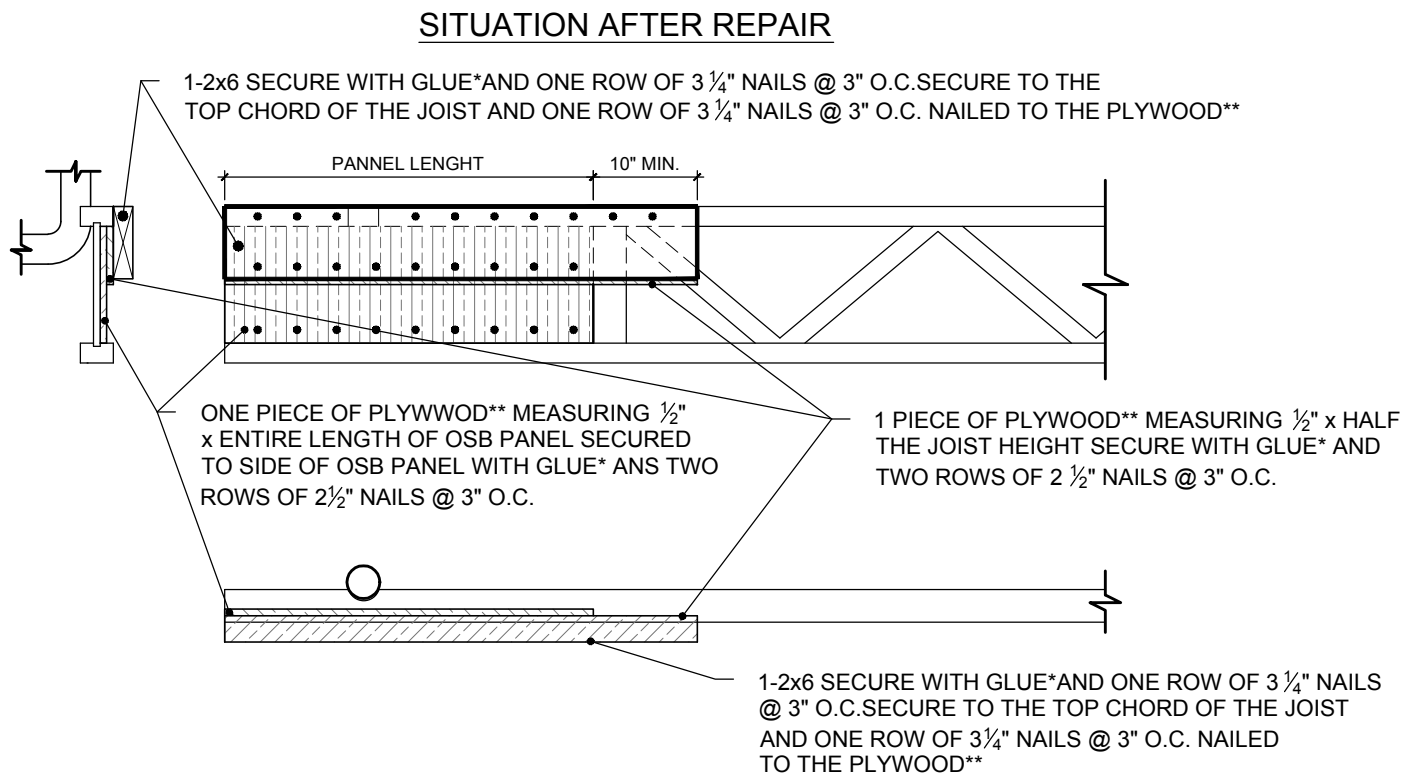


TYPICAL REPAIR METHOD FOR A NOTCHED 2X3 TOP CHORD, CUT LESS THAN HALF THE WIDTH (OSB NOT CUT), WITH PIPE

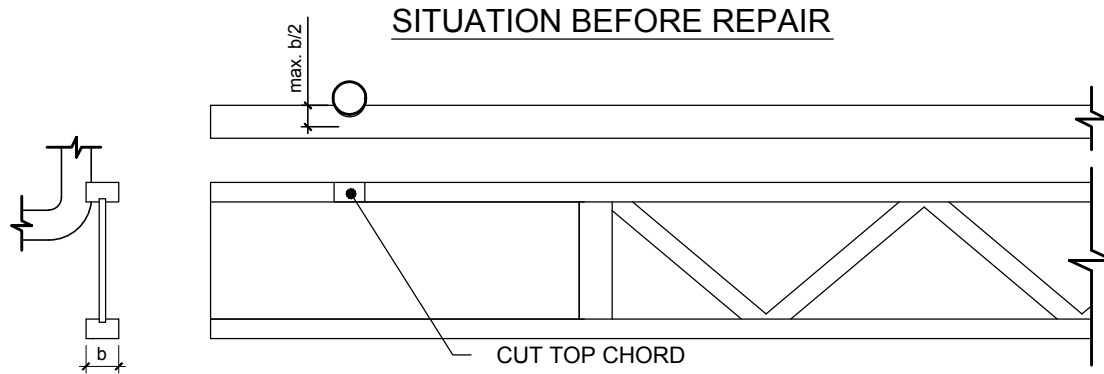

*PL PREMIUM GLUE

** Plywood - at least 1/2" 4 ply (15/32") or better

RTF-008-20

IMPORTANT NOTICES

If you can't make the repair as specified, please contact the manufacturer at the contact information above.

PL Premium Glue: Refer to Lepage manufacturer for recommendations and restrictions applicable to its use.

Before adding loads and/or moving the joist, the cure time specified by the glue manufacturer must be respected.

Check out the www.openjoisttriforce.com website for the latest updates.

