


TYPICAL REPAIR METHOD FOR A NOTCHED 2x4 TOP CHORD, CUT LESS THAN HALF THE WIDTH (OSB PANNEL NOT CUT), WITH PIPE

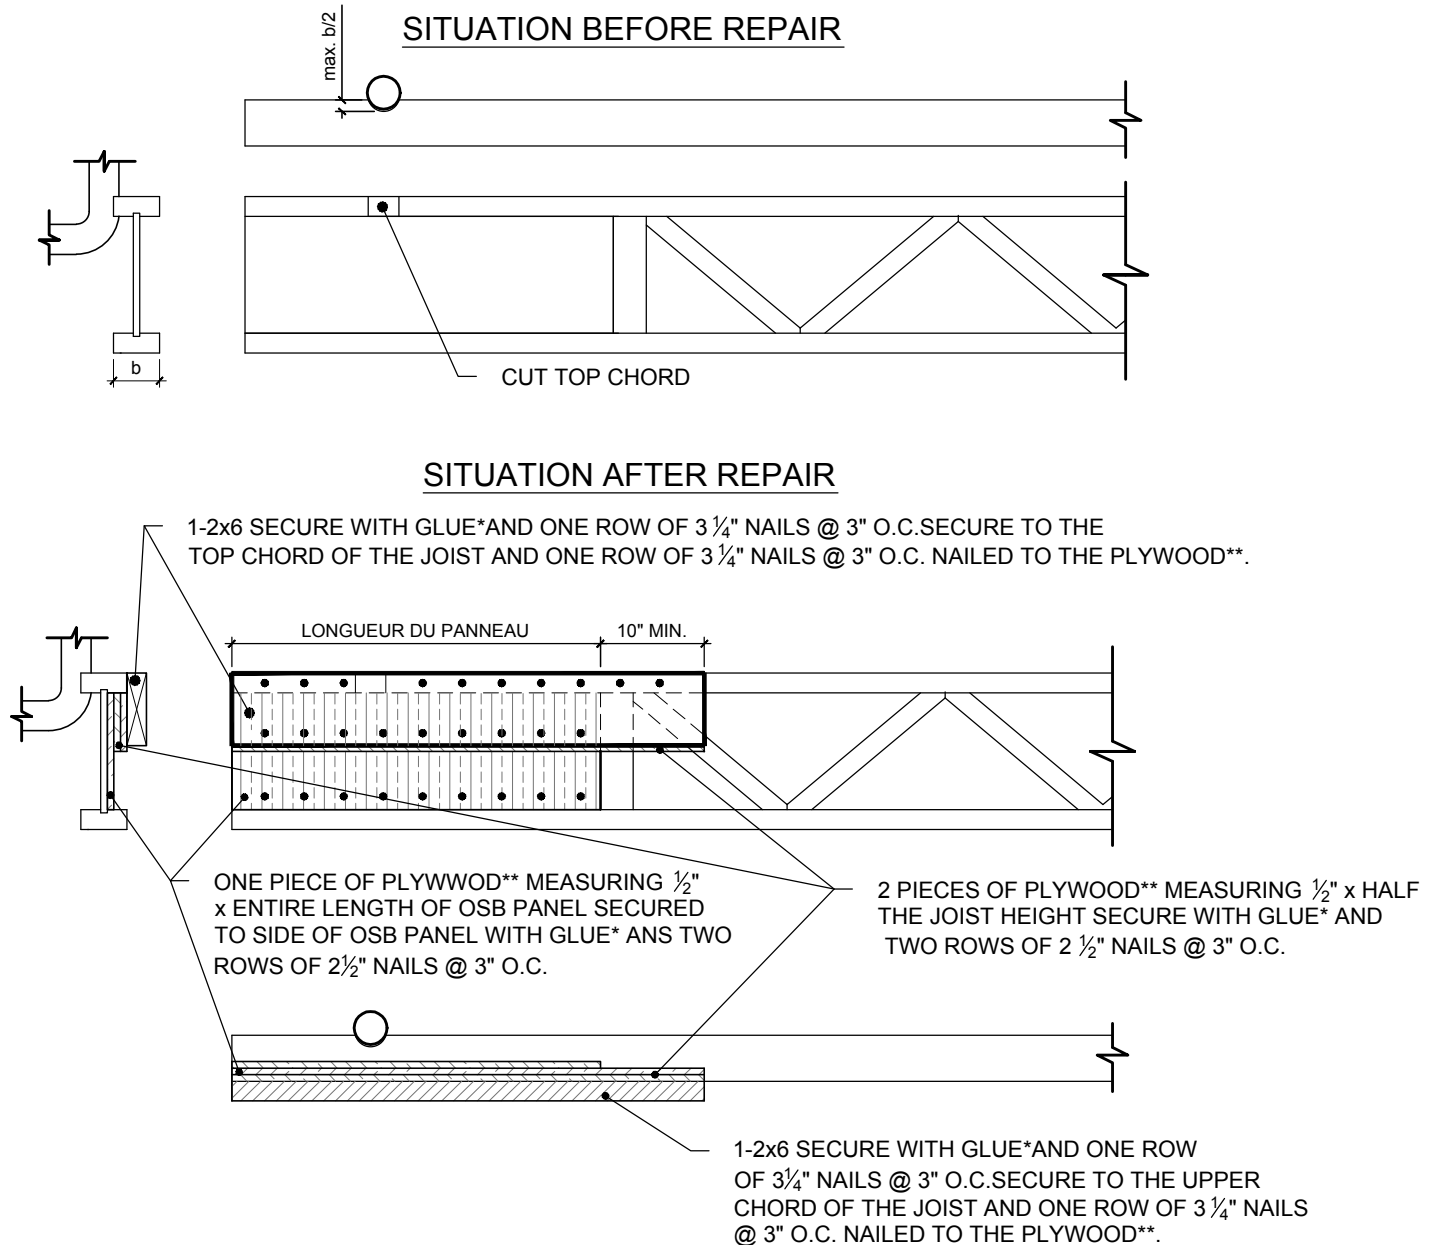

*PL PREMIUM GLUE

** Plywood - at least $\frac{1}{2}$ " 4 ply ($\frac{15}{32}$ ") or better

RTF-009-20

IMPORTANT NOTICES

If you can't make the repair as specified, please contact the manufacturer at the contact information above.

PL Premium Glue: Refer to Lepage manufacturer for recommendations and restrictions applicable to its use.

Before adding loads and/or moving the joist, the cure time specified by the glue manufacturer must be respected.

Check out the www.openjoisttriforce.com website for the latest updates.

